

POP[®]



Setting Tools

For POP[®] Rivets and POPNut[®] Threaded Inserts



POP® Rivet Setting Tools

From professional hand pliers to high capacity power tools, POP® rivet tools are reliable and lightweight, with a high force-to-weight ratio. They have been ergonomically designed and are easy to maintain.



Rivet Hand Tools	4
Rivet Power Tools	6
Riveting Systems	8
Rivet Tool Accessories	10

The POP® rivet installation sequence is simple.

1. Place the mandrel of the POP® rivet into the nosepiece of the setting tool.
2. Insert the POP® rivet body through the hole of the materials to be fastened.
3. Pull the trigger of the setting tool. The POP® Rivet body clamps the materials together and expands to form a secondary head on the blind side of the joint. The mandrel breaks at a pre-determined force.
4. The materials are now fastened together.




Rivet Hand and Battery Tools

POP® hand tools. Durable and reliable.
Ideal for a wide range of applications.




TT55D

Classic Hand Plier
Rivet Tool




PS15

Hand Plier
Rivet Tool



PS25

Lazy Tong
Rivet Tool



- Professional standard
- Lightweight, robust and ergonomic
- Supplied with full capacity range of nosepieces
- Supplied with nosepiece wrench

Article: 15370

Capacity: 2.4 - 4.0
Weight: 0.4kg
Length: 229mm

Article: 17492

Capacity: 2.4 - 4.8
Weight: 0.6kg
Length: 245mm


Article: 17496

Capacity: 3.0 / 3.2 - 6.4
Weight: 2.4kg
Length closed: 305mm
Length extended: 805mm




PS40

Lever
Rivet Tool




PS45

Telescopic
Lever Rivet Tool



MCS5800

Li-Ion
Battery Tool



Professional standard
Lightweight, robust and ergonomic
Supplied with full capacity range
of nosepieces
Supplied with nosepiece wrench

Versatile, cordless tool for indoor
or outdoor applications
High setting speed
Well balanced with optimum
center of gravity
Supplied with full capacity range
of nosepieces
Supplied with nosepiece wrench

Article: **17493**

Capacity: 3.0/3.2 - 6.4
Weight: 1.9kg
Length: 515mm

Article: **17494**

Capacity: 3.0/3.2 - 6.4
Weight: 2.6kg
Length: 490mm
Length extended: 665mm

Article: **15701**


Capacity: 3.0/3.2 - 4.8
Weight: 2.2kg
Length: 265mm
Height: 300mm
Tool Stroke: 20mm

Rivet Power Tools


POP® pneumatic power tools.
Setting a new standard.




ProSet® 1600 MCS
Micro to Mid-Range
Power Tool



ProSet® 2500 MCS
Mid-Range
Power Tool



ProSet® 3400 MCS
High Capacity
Power Tool



- Lightweight polymer construction
- High force-to-weight ratio
- Comfortable two finger activation
- Quick disconnect front end assembly and MCS
- Energy saving on/off, left or right swivel air fitting
- Spring return for reliable fast setting
- Available with MCS (pictured) or deflector

Article: 13492

Capacity: 2.0 - 4.0
Weight: 1.05kg
Length: 272mm
Height: 227mm
Tool Stroke: 18mm
Pulling Force: 4850N @ 6.2 bar
Force/Weight Ratio: 4.6kN/kg

Article: 14063

Capacity: 3.0 - 4.8
Weight: 1.31kg
Length: 304mm
Height: 259mm
Tool Stroke: 18mm
Pulling Force: 9400N @ 6.2 bar
Force/Weight Ratio: 7.18kN/kg


Article: 63408

Capacity: 3.2 - 6.4
Weight: 2.00kg
Length: 334mm
Height: 316mm
Tool Stroke: 26mm
Pulling Force: 18500N @ 6.2 bar
Force/Weight Ratio: 9.74kN/kg



MCS5250

In-Line
Power Tool




In-Line tool for suspension and POP® riveting in a vertical plane
Supplied with MCS5000 remote vacuum mandrel collector



PRG510

Robust
Power Tool




Fully pneumatic
Simple and effective
High tensile aluminium casting



PRG540

Heavy Duty
Power Tool



Strong and durable
High tensile aluminium casting

Article: **15685**

Capacity: 3.0 - 4.8
Weight: 1.8kg
Length: 397mm
Width: 113mm
Tool Stroke: 15.87mm
Pulling Force: 7.56kN

Article: **16260**

Capacity: 2.4 - 4.0
Weight: 1.8kg
Length: 166mm
Height: 293mm
Tool Stroke: 15.87mm
Pulling Force: 4.48kN

Article: **16500**

Capacity: 2.4 - 6.4
Weight: 2.2kg
Length: 230mm
Height: 293mm
Tool Stroke: 17.4mm
Pulling Force: 14.2kN

Riveting Systems

POP® rivet setting systems. Increase the efficiency of your production line.



Multi-Head

Multiple Rivet Setting Workstations

- Purpose built with multiple setting heads
- Designed for individual customer needs
- Simultaneous rivet setting saves time
- Foot operated trigger frees both hands for rivet loading and manoeuvring assembly
- High reliability minimises downtime
- Integral mandrel collection keeps workspace tidy



Rivet Presenter

Rotary Bowl Rivet Feeding System

- Facilitates single handed, high speed riveting and setting
- To be used in conjunction with any ProSet® Rivet Power tool (MCS Version)
- Feeder bowl has capacity for up to 1000 rivets
- Rivet is automatically loaded into the front of the tool when the tool is inserted into the receptacle at the front of the Rivet Presenter
- Easy to refill
- Ideal for "white glove" environments



MCS5000

Remote Mandrel Collector

- Holds up to 8500 spent mandrels
- Promotes easy removal and recycling of scrap mandrels

Weight: 10.4kg
Length: 546mm
Height: 336mm
Width: 222mm
Working Air Pressure: 5.8 bar



Weight: 2.2kg
Height: 414mm
Diameter: 527mm
Air Consumption: 317litres/min
Max. Tube Length: 4.5m
Max. Rise: 1.8m
Max. Mandrel Length: 50mm

Rivet Tool Accessories

Corner heads and front end kits.
For restricted access.



PRH830



For use with:

ProSet® 2500	Adaptor Kit: 18731
PRG510	Adaptor Kit: 19490
PRG540	Adaptor Kit: 19488



Article: **19480**

Capacity: up to 3.2mm

Weight: 0.31kg



PRH840

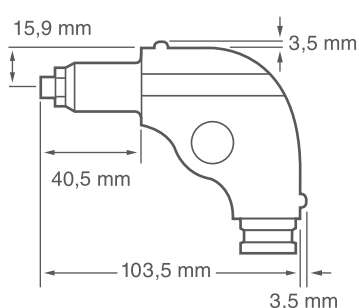

For use with:

ProSet® 2500	Adaptor Kit: 18737
ProSet® 3400	Adaptor Kit: 18750
PRG510	Adaptor Kit: 19153
PRG540	Adaptor Kit: 19145



Article: **19024**

Capacity: up to 4.8mm

Weight: 0.5kg



PRH850

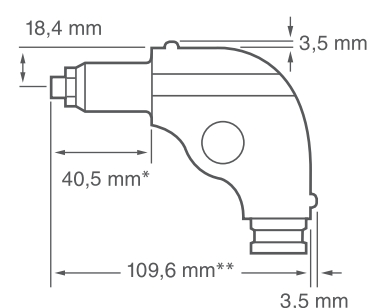

For use with:

ProSet® 3400	Adaptor Kit: 18869
PRG540	Adaptor Kit: 19254

Article: **19240**

Capacity: up to 6.4mm

Weight: 0.76kg

Rivet Tool Accessories

Corner heads and front end kits.
For restricted access.




Front End Kits

ProSet® 1600

Extended front end for deep applications

Capacity: 2.4 - 4.0mm

Article: **13495**

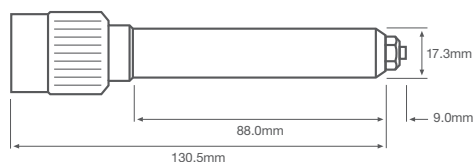


ProSet® 2500

Extended front end for deep applications

Capacity: 3.0 - 4.8mm

Article: **13163**

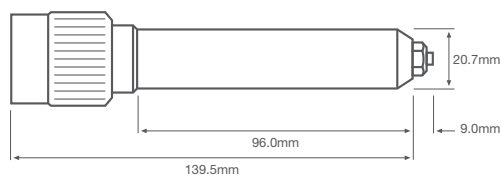


ProSet® 2500

Reduced diameter extended front end for narrow applications

Capacity: 3.0 - 4.0mm

Article: **13164**

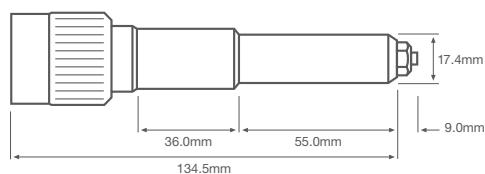


ProSet® 3400

Extended front end for deep applications

Capacity: 3.2 - 6.4mm

Article: **13172**

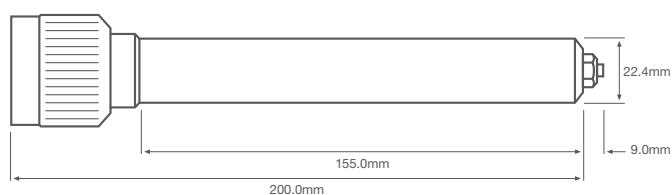

Recommended nosepieces for all rivet tools.

POP® Rivet Power Tools

Article	Nosepieces	Rivet Type	Riv Dia	ProSet® 1600	PRG 510	ProSet® 2500	MCS 5250	PRG 540	ProSet® 3400
15801*	PRN214	Open	2.00	●					
17595	PRN314	Open	2.40	●	●				
16216	PRN414	Open: all materials; Closed: St, SS, NC / Steel mandrel	2.80 - 3.20	●	●	●	●	●	●
16214	PRN514	Open: all materials; Closed: St, SS, NC / Steel mandrel	4.00	●	●	●	●	●	●
17623	PRN614	Open & Closed: St, SS, NC	4.80		●	●	●	●	●
16546	PRN811	Open: all materials; Closed: St, SS, NC / Steel mandrel	6.40					●	●
16213	PRN424	Closed: Aluminium / Steel mandrel	3.20	●	●	●	●	●	●
16215	PRN524	Closed: Aluminium / Steel mandrel	4.00	●	●	●	●	●	●
17598	PRN624	Open & Closed: Aluminium / Steel mandrel	4.80			●	●	●	●
16547	PRN822	Open & Closed: Aluminium / Steel mandrel	6.40					●	●
16548	PRN434	Closed: Aluminium / Aluminium mandrel	3.20	●	●	●	●	●	●
17597	PRN534	Closed: Aluminium / Aluminium mandrel	4.00	●	●	●	●	●	●
16549	PRN634	Closed: Aluminium / Aluminium mandrel	4.80			●	●	●	●
16490	PRN625	T-Rivet	4.80			●	●	●	●
16491	PRN825	T-Rivet	6.40					●	●
19422	PRN4HR	HR	3.20	●	●	●	●	●	●
19423	PRN5HR	HR	4.00	●	●	●	●	●	●
19424	PRN6HR	HR	4.80			●	●	●	●
15406	N-406	Ultra-Grip	4.80			●		●	●
19496	N-407	Ultra-Grip	6.40					●	●
42257	PRN8PS	HS	6.40					●	●

* Requires PRG402-02 Jaws and FAN239-176 Jaw Pusher. Refer to tool manual.

● Nosepiece supplied with tool ● Recommended nosepiece, supplied separately

POP® Rivet Hand Tools

Article	Nosepieces	Rivet Type	Riv Dia	TT55D	PS15	PS25	PS40	PS45
15371	TT55 Nosepiece 3/32	Open	2.40	●				
15372	TT55 Nosepiece 1/8	Open and Closed	2.80 - 3.20	●				
15373	TT55 Nosepiece 5/32	Open and Closed	4.00	●				
12213	DPM400-A08	Open	2.40		●			
12214	DPM400-B08	Open and Closed	2.80 - 3.20		●			
12216	DPM400-C08	Open and Closed	4.00		●			
12218	DPM400-D08	Open and Closed	4.8 - 5.0		●			
12215	DPM400-B10	Open and Closed	2.80 - 3.20			●	●	●
12217	DPM400-C10	Open and Closed	4.00			●	●	●
12219	DPM400-D10	Open and Closed	4.8 - 5.0			●	●	●
12220	DPM400-E10	Open	6.00			●	●	●
12221	DPM400-F10	Open and Closed	6.40			●	●	●
49952	DPM400-DUG	Ultra-Grip	4.80			●	●	●
49953	DPM400-FUG	Ultra-Grip	6.40			●	●	●

● Nosepiece supplied with tool ● Recommended nosepiece, supplied separately

POP® Rivet Battery Tool

Article	Nosepieces	Rivet Type	Riv Dia	MCS 5800
15709	MCS5800-14	Open & Closed / Steel mandrel	2.40 - 3.20	●
15711	MCS5800-15	Open: all materials	2.80 - 3.20	●
15713	MCS5800-16	Open & Closed: Alu / Steel mandrel*	3.20 - 4.00	●
15713	MCS5800-16	Open & Closed / Aluminium mandrel	4.0	●
15715	MCS5800-17	Open & Closed / Steel mandrel*	4.0	●
15717	MCS5800-18	Open & Closed: all materials	4.8/5.0	●

Further tool / nosepiece configurations may be possible for the rivet you have selected. Please contact Emhart for further technical advice.

Open rivets incorporate: Break Stem Open, Vgrip®, LSR, MGR, FSR, Peel, Grooved and STR rivet types

Closed rivets incorporate: Closed end and TWD rivet types

A further selection of nosepieces are available for MCS5800, please refer to POP® Tools Spares Guide.

* Use this nosepiece for Grooved, Multigrip and pure aluminium open rivets in 3.2mm diameter.

POP® Rivet Range


All from one source.

POP® Rivet and Tools – the perfect combination.




Break Stem Open

General purpose open rivet available in wide range of materials and head styles. Suitable for applications with normal load bearing requirements.




Vgrip™

High performance, Multi-Grip rivet with excellent claim properties and a wide blind side spread. Also features a positively retained mandrel head and grooved stem for optimum tool jaw life.




Closed End

Designed with a completely closed body, this rivet is ideal for applications that need to be water/pressure tight or where mandrel retention is paramount.




LSR (Load Spreading Rivet)

Load spreading characteristics make this rivet ideal for use in vulnerable, friable and the softest of materials.



MGR (Multi-Grip Rivet)

The Multi-Grip rivet is designed to accommodate a wider grip range than other rivets allowing for lower inventory levels. Also provides good, rattle free, joint construction even in irregular holes.



FSR (Flush Setting Rivet)

Open rivet that sets flush on both sides of the application when set into a double countersunk hole. This space saving rivet offers near zero protrusion and eliminates loose mandrels.



Peel


Ideal for joining softer and more brittle materials such as plastics, rubber, wood, GFRP or laminates.





TVD

This unique closed end stainless steel range provides additional support to assemblies where weak or thin blind side materials are present.




T-Rivet

The T-Rivet offers all the features of a peel rivet with the added benefit of pull-up. Improved shear strength is also achieved due to mandrel head retention after setting.




HS (High Strength)

The POP® rivet with the strength of an M6 Bolt also provides excellent claim properties, a positively retained mandrel head and wide blind side expansion.




HR (High Retention)

Exceptional pull-up capability and increased blind side expansion give the perfect combination for overcoming air gaps whilst spreading the load during setting. Excellent mandrel retention and rattle resistance after setting.




Grooved

Aluminium rivet for fixing into wood and other soft/fibrous base materials. Suitable for use in blind non-through holes.




STR

This steel rivet has a peeling body ideal for use in wood and providing high resistance to pull out loads and mandrel head retention.



Ultra-Grip

Ultra-Grip (UG) Structural POP® Rivets offer high shear strength across wide grip ranges. The product also features excellent pull-up capability, provides hole filling and the resultant set product is rattle free.



POP Nut®

Threaded Insert Setting Tools

POPNut® setting tools give you the most up-to-date features to provide you with excellent setting performance. Compact and lightweight, reliable and easy to use, our tools offer optimum performance, whatever your application.



Threaded Insert Hand Tools	16
Threaded Insert Power Tools	18
Range Guide	20

The POPNut® installation sequence is simple.

1. Push the POPNut® on the tool mandrel and it automatically spins on.
2. Place the POPNut® in the hole in the parent material.
3. Pull the trigger on the tool. The POPNut® collapses and forms a flange on the back side of the parent material. The tool automatically reverses and unthreads from the POPNut®.
4. Attach the mating part with a bolt and tighten.



Threaded Insert Hand Tools

POPNut® hand tools. Ideal for light engineering work, maintenance and repair.



PNT110
Hand Plier
Tool

PNT210
Ratchet
Tool

PNT110 SETTING CAPACITY	
ALUMINIUM	M3 - M6
STEEL	M3 - M5
STAINLESS STEEL	M3 - M5

PNT210 SETTING CAPACITY	
ALUMINIUM	M4 - M12
STEEL	M4 - M12
STAINLESS STEEL	M4 - M12

- Professional standard
- Lightweight, strong design
- Adjustable mandrel protrusion
- Quick change mandrel and nosepiece
- Supplied with full capacity range of mandrels and nosepieces

Article: 43111

Weight: 0.8kg
Length: 240mm

Article: 43112

Weight: 1.3kg
Length: 210mm



PNT310
Spindle Lever
Tool

PNT310 SETTING CAPACITY

ALUMINIUM	M4 - M12
STEEL	M4 - M10
STAINLESS STEEL	M4 - M8



PNT410
Lever Tool

PNT410 SETTING CAPACITY

ALUMINIUM	M5 - M12
STEEL	M5 - M12
STAINLESS STEEL	M5 - M10

- Professional standard
- Lightweight, strong design
- Adjustable mandrel protrusion
- Quick change mandrel and nosepiece
- Supplied with full capacity range of mandrels and nosepieces

Article: **43113**

Weight: 2.4kg

Length: 555mm

Article: **43114**

Weight: 2.1kg

Length: 580mm

Threaded Insert Power Tools and Systems

POPNut® power tools. Stroke or pneumatic control to suit your production environment.



PNT800L-PC

Pneumatic Control
Tool

PNT800L-PC SETTING CAPACITY

ALUMINIUM	M6 - M10
STEEL	M4 - M10
STAINLESS STEEL	M4 - M10

PNT1000L-PC

Pneumatic Control
Tool

PNT1000L-PC SETTING CAPACITY

ALUMINIUM	M6 - M12
STEEL	M6 - M12
STAINLESS STEEL	M6 - M12

Pneumatic control (PC) function
automatically selects optimum stroke

Fast cycle time as optimum stroke
always delivered

Automatic mandrel spin on for fast
insert loading

Quick change mandrel and nosepiece

Lightweight, compact structure

Single trigger pull for setting and reverse

Article: 42709

Weight: 1.81kg
Length: 287mm
Height: 268mm
Tool Stroke: 1.3 - 6.5mm
Working Air Pressure: 4.9 - 5.9 bar

Article: 42708

Weight: 2.77kg
Length: 315mm
Height: 295mm
Tool Stroke: 1.3 - 10.5mm
Working Air Pressure: 4.9 - 5.9 bar



PNT800A

Pneumatic-Hydraulic
Stroke Tool

PNT800A SETTING CAPACITY

ALUMINIUM	M3 - M10
STEEL	M3 - M10
STAINLESS STEEL	M3 - M8

- Spin-pull pneumatic hydraulic tool
- Automatic mandrel spin on for fast insert loading
- Quick change mandrel and nosepiece
- Simple stroke adjustment gauge
- Lightweight, compact structure
- Single trigger pull for setting and reverse



POP® Counter System

Simple-to-use
Batch Counter

- Simple "key set" display
- Counts each tool trigger pull
- Batch complete indicator
- Automatic air cut-off at batch complete point
- Assists operator accuracy
- Supports the quality assurance of the assembly process
- Helps ensure the correct number of threaded inserts has been set







Article: 42825

Weight: 1.68kg
Length: 288mm
Height: 263mm
Tool Stroke: 1.3 - 6.5mm
Working Air Pressure: 4.9 - 5.9 bar

Weight: 5kg
Height: 200mm
Width: 200mm
Depth: 120mm
Max. Batch Quantity: 999

POPNut® Range

All from one source. POPNut® Threaded Inserts and Tools – the perfect combination.

		Aluminium		Steel		Stainless Steel	
Open End		Round	Round	Linear Knurls	Hexagonal	Round	Semi-Hexagonal
	Flat Head	●	●	●	●	●	●
	Countersunk Head	●	●	●		●	
	Reduced Head	●	● [*]	●	● [†]	●	●
Closed End							
	Flat Head	●	●	●	●	●	
	Countersunk Head	●	●	●			
	Reduced Head				●		

* Metric and Imperial ranges available
 † Semi-Hexagonal also available



POP® Tool Service Centres

Expert service and repair available from a network of approved service centres across Europe.




If you have invested in a POP® Tool then be assured that there is a network of highly experienced and competent POP® Tool Service Centres around Europe to support you.

To find your local Service Centre visit emhart.eu and select 'POP® Tool Service Centre' as your product line in the 'Find your distributor' page.



Tools Spares Guide

The complete range of spare parts.
Available for POP® and POPNut® tools.

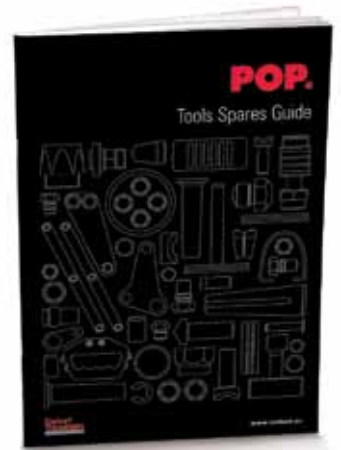


The POP® Tools Spares Guide is a users and buyers manual which assists in the identification of required spare parts.

Throughout the guide you will find:-

Exploded Views

Each tool listed is accompanied by an annotated exploded diagram to assist in the easy identification of the required spare part.



Front End Selection Guidance

On every tool page the first table groups together the essential components to construct the correct front end, to set the required size of rivet or threaded insert.



Wear and Spare Parts Identified

In each tool table, wear and spare parts are identified in the part type column. This feature will aid you in choosing the correct stock profile.

	Part Type
	W
	S
	S
	S
	W

Common Parts Listed

A table is provided which highlights spare parts that are shared by more than more than one tool. This will prevent unnecessary replication of parts within your inventory.

Emhart Media Library

Visit the Emhart Media Library, emhartmedia.com, to download:

- Tool Maintenance Manuals
- Tool Catalogues and Information
- Tool Images



Experience in manufacture – over 100 years

With over 100 years experience in the design and manufacture of assembly technology, Emhart remains a company infused with the spirit and culture of quality and innovation.

Multiple customers served in many diverse sectors

Emhart serves customers in many different sectors who have vastly different manufacturing environments; from repair and maintenance, site work, medium production lines and then to highly sophisticated automated production lines. Our fastening systems offer the perfect assembly solutions for them all.

Extensive product portfolio

Emhart's wide portfolio of fasteners includes POP® Rivets, POPNut® Threaded Inserts, hand and power setting tools and semi-automation systems, plus Tucker® Stud Welding and plastics. We are constantly reviewing and improving our products to offer the best assembly features in the market today.

Design and engineering in partnership

From design...to prototype...to manufacture. Where a specialist solution is required our experienced design team are on hand to work in partnership with your engineers to develop bespoke assembly solutions.

Technical expertise

Emhart offers full customer support by providing extensive technical training for our setting tools and Stud Welding systems. We can also perform a full review of your assembly line techniques to help your facility to optimum production output.

Marketing support for our distributors

We support our network of experienced distributors by providing quality products, technical training and marketing support items.

Quality Accreditations

Maintaining a high level of quality is an absolute priority for Emhart. From the control of incoming goods to intermediate tests within manufacturing to the final quality tests and delivery to the customer, quality management is the central theme. Emhart is accredited to TS16949, ISO9001, ISO14001.

Visit our new website **emhart.eu** for the latest news, literature, application advice, online interactive product catalogues and much more.



© Emhart Technologies 2012

The latest version of this catalogue is available to view and download at www.emhartmedia.com

POP®, ProSet®, POPSet® and POPNut® are registered trademarks of Emhart Technologies.

Quality systems approvals from the world's household names in manufacturing serve to reinforce accreditation to ISO14001 / ISO9001 / TS16949.

As a result of our continuous design improvement, Emhart products are subject to modification. The latest technical data and drawings are available for any specific products on request.