



P7 ATCA® Inject / Eject Mechanism Ejectors

- Ergonomic inject / eject lever designed for easy operation
- Secondary catch on inject / eject operates microswitch to permit hot-swapping

Material and Finish

Steel plated and glass-filled nylon, black
Washers: Stainless steel

Performance Details

Flammability rating: UL94-V0


Installation Notes

See page 499


Notes

Custom colors available, please contact Southco

Lever Style Switch Operation




Plunger Style Switch Operation




ATCA is a registered trademark of PICMG® - PCI Industrial Computer Manufacturers Group, Inc.

Lever Style Switch

Panel thickness 0.8 - 1.5 (.031 - .059)

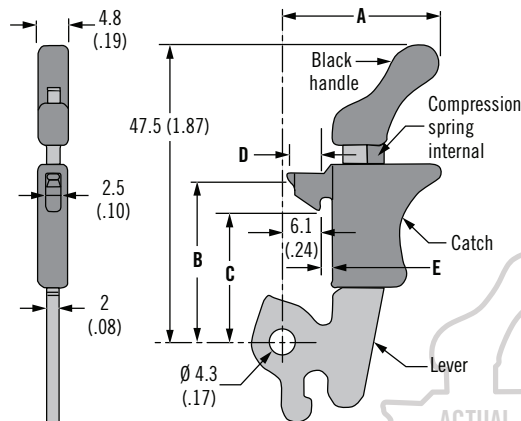


Panel thickness 2 - 2.5 (.078 - .098)

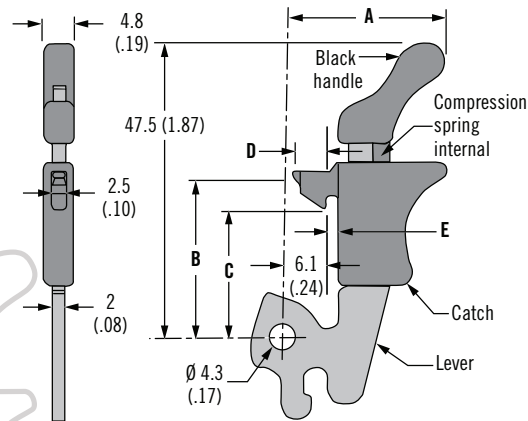


Plunger Style Switch

Panel thickness 0.8 - 1.5 (.031 - .059)

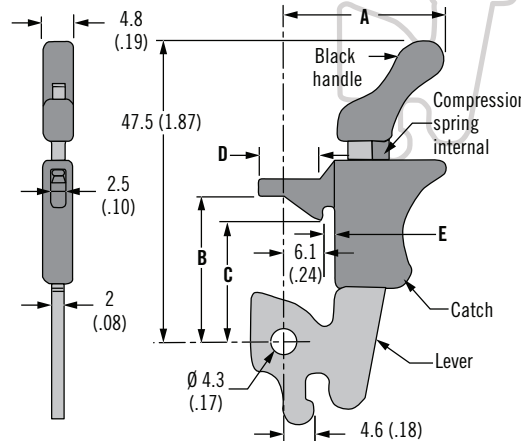


Panel thickness 2 - 2.5 (.078 - .098)

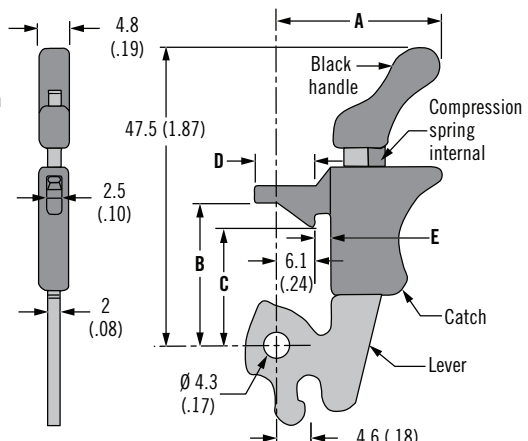


Style	Panel Thickness	Part Number	A	B	C	D	E
Lever style complete with u-bent washer	0.8 - 1.5 (.031 - .059)	P7-A-513-11	25.2 (.99)	26.1 (1.03)	20.8 (.82)	5.4 (.21)	1.9 (.07)
	2 - 2.5 (.078 - .098)	P7-A-523-11	26.2 (1.03)	26.1 (1.03)	20.8 (.82)	5.4 (.21)	2.9 (.11)
Plunger style complete with belleville washer	0.8 - 1.5 (.031 - .059)	P7-A-533-11	25.2 (.99)	23 (.90)	19 (.75)	9.6 (.38)	1.9 (.07)
	2 - 2.5 (.078 - .098)	P7-A-543-11	25.2 (.99)	23 (.90)	19 (.75)	9.6 (.38)	2.9 (.11)

U-Bent Washer (supplied)



Belleville Washer (supplied)



Dimensions in millimeters (inch) unless otherwise stated

